

MODWALL Adaptable Room System

Product Specifications






Product Detail

System Specifications

Ceiling Height	Up to 9′	
Uninterrupted Room Size	Up to 16' x 32'	
Configurations	Customizable w/ Standard Options Available	
Systems Integrations	Electrical, AV, Lighting Control, Fire Alarm, and Fire Suppression	
Acoustic Performance	45 STC Wall Assembly	
Leadtime	Standard Configuration: Custom Configuration:	2 Weeks 8 Weeks
Installation Duration	1-2 Weeks (depending on project size and complexity)	
Tolerances	Up to 1-1/2" floor level change	

Reasonable \$/SF Investment Easy to Install and Reconfigure Structurally Self-Supporting Modular in Concept, Not in Aesthetic High Performance

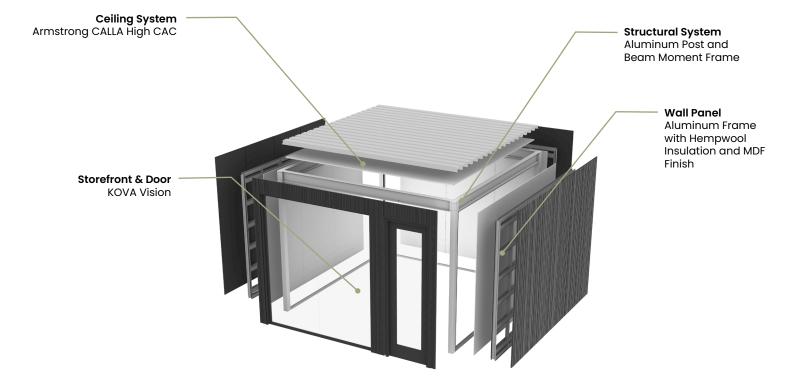

Standard Configurations

The Four Pack

17' x 21' 4 - huddle rooms / private offices

KOVA Vision 2 Storefront with Sliding Glass Doors Standard Fixture and Finish Options





The Hub

23' x 30'

- 2 huddle rooms / private offices
- 1 small meeting room
- 1 medium meeting room

KOVA Vision 1 Storefront with storefront doors Standard Fixture and Finish Options





The Neighborhood

30' x 54'

- 4 huddle rooms / private office
- 2 small meeting rooms
- 1 medium meeting room
- 1 large meeting room

KOVA Vision 1 Storefront with solid core wood and sliding glass doors Standard Fixture and Finish Options





Finishes

Wall Finish



Insulation



3.5" Hempwool


Acoustic Ceiling



Armstrong CALLA High CAC, 2x5 with tegular grid

Storefront, Doors and Fixtures

Storefront and Doors

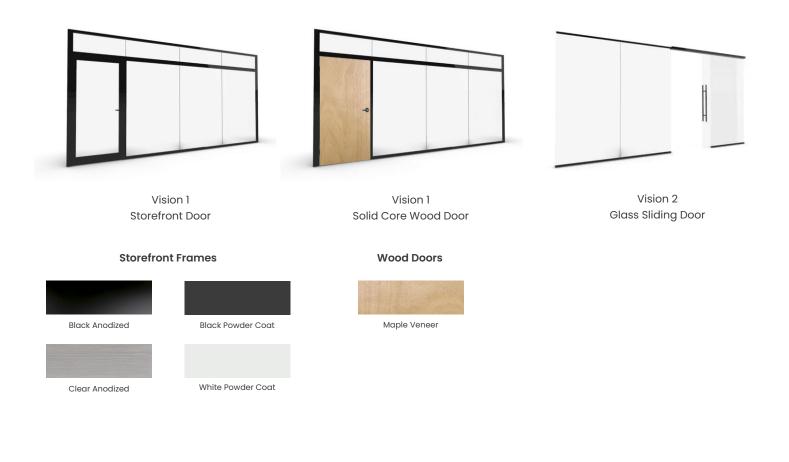

Fixtures

Standard Option



Mark Slot 2 Pendant





OCL Loop (24")

Linear Slot Diffuser



Price 3 5/8"